


Videophone System / Lobbyphone



KLP-C100/100



KLP-P100



Color Lobby Phone

KLP-C100 KLP-C104/KLP-C108/KLP-C112

B/W Lobby Phone

KLP-100 KLP-104/KLP-108/KLP-112

Normal Lens Type



KLP-C100 / KLP-100



KLP-C104 / KLP-104



KLP-C108 / KLP-108



KLP-C112 / KLP-112

Pinhole Lens Type



KLP-P100



KLP-P104



KLP-P108



KLP-P112


Function

- Upto 4 House (-104 type) / Upto 8 Houses (-108 type)
Upto 12 Houses (-112 type)
- Upto 450 Houses Connection (10 Key Button Type)
- Communication with Guard Master (10 key Button Type)
- Door Open Function by Access Code (10 key button type)
or by RF cards (option)
- Angle Adjustment (Up & Down, Right & Left)
- Firm Metal Body Case with New Modern Design
- Upto 9pcs of Common Gate Cameras Connection in a Building
- Normal & Pinhole Lens Camera (KLP-P Series) Selection

Specifications

- Power : DC 17V±2V
- Power consumption : Max. 9W, DC 12.8V±1V
- Mim. illumination : 1 lux on the object (IR LED ON)
- Mount type : Flush mount
- Assurance temperature : -20°C ~ +50°C
- Dimension (mm) : 122(W) x 255(H) x 33.5(D)
- Box(mm) : 101(W) x 223(H) x 105(D)
- Monitor connection :
Color camera-KIV-212, KIV-D212, KCV-802R, KCV-D802R
B/W camera-KIV-102, KIV-D102, KVM-520, KVM-D520

Dimension

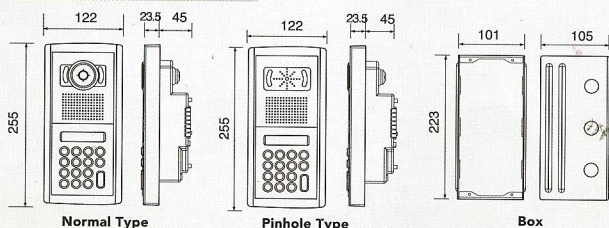

Accessory

