



Videophone

6 Wire Bus Type Videophone



Videophone

KVR-A516

C O L O R




Function

- Visitor identify & Communication with lobbyphone
- Door open
- Home intercom
- Visitor video recording
- 5 melody choice
- Monitors CCTV or door camera (4CH)

Specification

- Display : 10" Color Digital Touch LCD
- Power : AC 100-240V~, 50/60Hz
- Power Consumption : 9W(ON STAND BY), 30W(FULL LOAD)
- Surface Size : 335(W) x 185(H) x 40(D)mm
- *Cradle : 205(W) x 145(H) x 105(D)mm
- Available Camera : KC-C60, KC-MC30, KC-MC31, KC-MC24, KC-MC20

Diagram

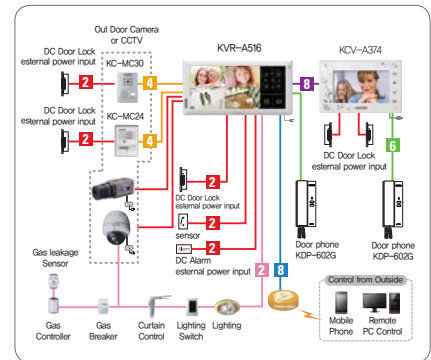

KCV-A376 / KCV-D376

C O L O R




Function

- Visitor identify & Communication
- Door open
- Easy OSD menu & Touch button
- Call with Guard
- Intercom
- Monitors door camera

Specification

- Display : 7" Digital Color LCD(NTSC/PAL)
- Power : - KCV-A376 : AC 100-240V, 50/60Hz
- KCV-D376 : DC 15V±10%
- Power Consumption :
- KCV-A376 : Stand by 2.5W, Max. 13W
- KCV-D376 : Stand by 2.5W, Max. 13W
- Surface Size : 222(W) x 144(H) x 33(D)mm
- Available Camera : KC-C60, KC-MC30, KC-MC31, KC-MC24, KC-MC20

Diagram

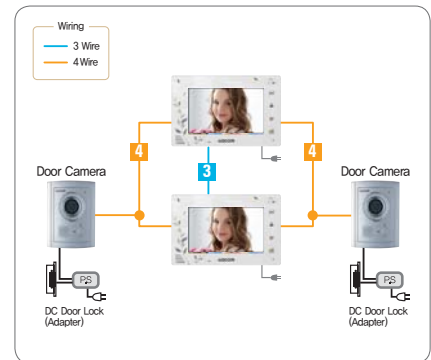

KIV-212 / KIV-D212

C O L O R



Function

- Visitor identify & Communication
- Door/Gate Open
- Suits for house to villas (up to 450 units)
- Up to 5 indoor units (4 monitors & 1 audio handset (IP-603), 2 door cameras
- Intercom
- Call with Guardmaster (KIP-120)
- Monitors door/gate camera

Specification

- Display : 5" TFT Color LCD(handfree videophone)
- Power : - KIV-212 : AC 100-240V, 50/60Hz
- KIV-D212 : DC 17V±2V
- Power Consumption : Stand by 4.8W, Max. 19W
- Surface Size : 237(W) x 199(H) x 39(D)mm
- Available Camera : KC-C60, KC-MC30, KC-MC31, KC-MC24, KC-MC20

Diagram

